

10.00mm(.400") Wire To Wire And Wire To Board Connector








SPECIFICATIONS:

- Current Rating: W to W :50AAC,DC
W to PCB :48AAC,DC
- Voltage Rating:600V AC,DC
- Operating Temperature:-40℃~+130℃
- Contact Resistance:20mΩ max.
- Insulation Resistance:1000MΩ Min.
- Withstanding Voltage:1000V AC/minute
- Material: NylonUL94V-0
- Use With:T9910Series
- Wire Size:AWG#8~#16
- UL File No:E304945
- GWT:750℃ IEC-60335-1

Shenzhen Hongru Connector Co., Ltd

Email:yukyli@hrb-connector.com
Tel: 86-0755 2709 6669
Fax: 86-0755 2709 2392
Skype: haiyuncheng-vivian
Mobile(whatsapp): 86-186 8112 3590
Website: http://www.hrb-connector.com

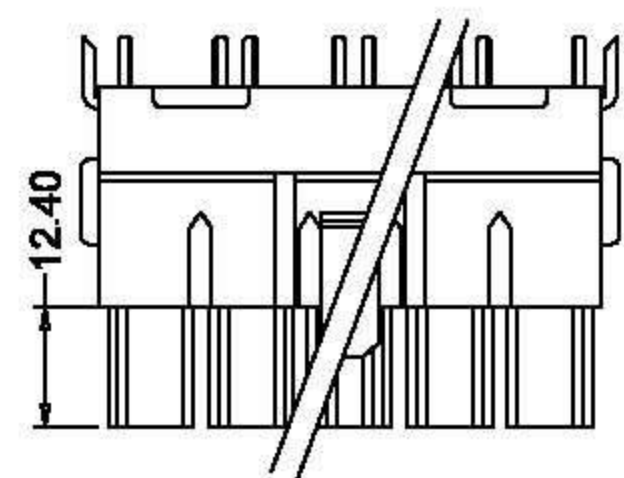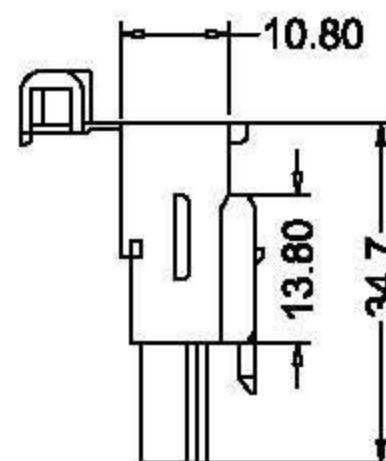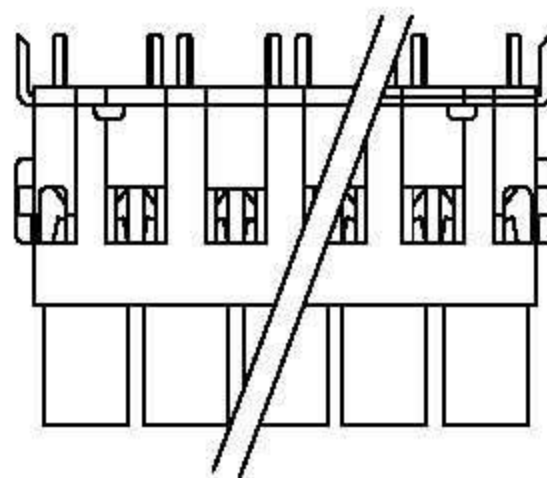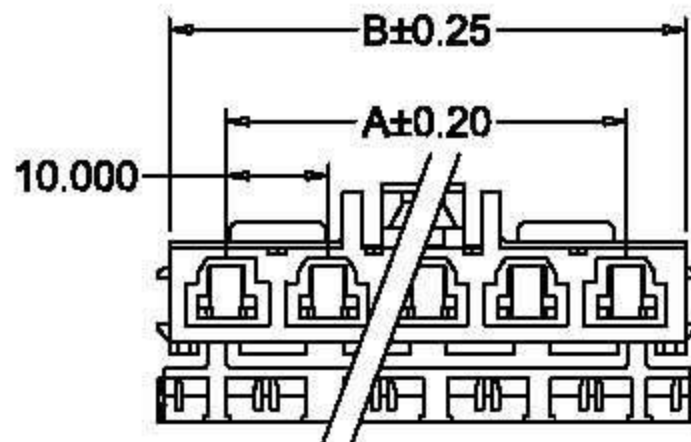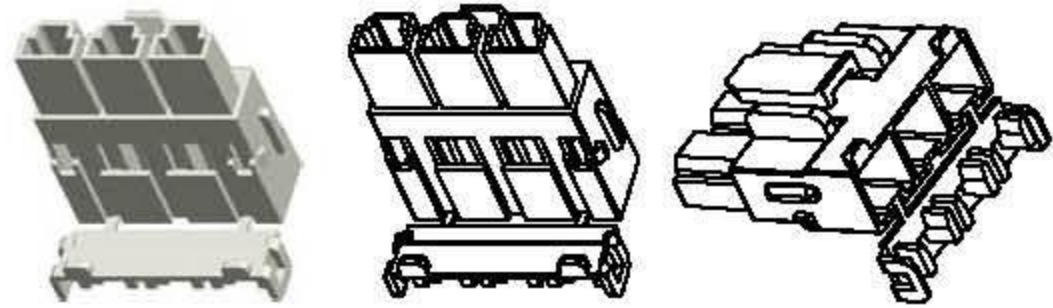

Ordering Information And Dimensions

Part NO.	Circuits	Dimensions	
		Dim:A	Dim:B
TYP UL94V-0			
P9910-2-B-H-A/B	2	10.00	31.30
P9910-3-B-H-A/B	3	20.00	41.30
P9910-4-B-H-A/B	4	30.00	51.30
P9910-5-B-H-A/B	5	40.00	61.30
P9910-6-B-H-A/B	6	50.00	71.30

